

# YORGLASS

SATINATED



**YORGLASS CAM SAN. VE TİC. A.Ş.**  
**Keçiliköy OSB Mah. Metin Ersan Cad. No:13**  
**45140 / MANISA / TURKEY**



**+90 850 622 02 26**



**info@yorglass.com**  
**marketing@yorglass.com**

# YORLUX

## Soft Touch



### Light Transmittance

4 mm Clear Float Yorlux	85,6
6 mm Clear Float Yorlux	85,3
8 mm Clear Float Yorlux	84,8
12 mm Clear Float Yorlux	84,6
4 mm Low Iron Yorlux	87,4
6 mm Low Iron Yorlux	86,0
8 mm Low Iron Yorlux	86,5
12 mm Low Iron Yorlux	86,3

Colours and finishings that has shown in the photographs may slightly differ in natural light.

Substrate	Thickness	Light Transmittance
Clear Float	3 mm - 12 mm	85% - 87%
Low Iron	4 mm - 12 mm	86% - 88%

Substrate	Gloss	Clarity	Haze
Clear Float	10 - 15	6 - 10	90% - 95%
Low Iron	10 - 15	6 - 10	90% - 95%



# CRYSTALLUX

## Scratch Resistant




### Light Transmittance

4 mm Clear Float Yorlux	85,6
6 mm Clear Float Yorlux	85,3
8 mm Clear Float Yorlux	84,8
12 mm Clear Float Yorlux	84,6
4 mm Low Iron Yorlux	87,4
6 mm Low Iron Yorlux	86,0
8 mm Low Iron Yorlux	86,5
12 mm Low Iron Yorlux	86,3

Colours and finishings that has shown in the photographs may slightly differ in natural light.

### Mosh Value

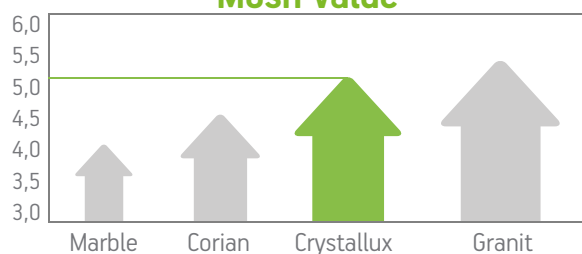


# DECORATIVE LINE

## Inspired by Nature



Max size 3210x2250mm | Thickness 3mm - 19 mm  
Available on Low Iron, Bronze, Grey, Blue, Green float glass.



AFRICA



HARMONY



ASOS




BAMBOO



EAR



BEAD



BRICK




BUBBLE



BOUQUET




PINE



LINE



DAMAS



DROP



FLAME



ROSE




STRAW



IVY




RUG



LEATHER



MAGNOLIA



CORAL



MOTION




MOSAIC



NEW LEAF




OXFORD




TWINKLE



PUNTO




EKOSE



RAINDROPS




RANDOM



SARKIT




SARMAK



SPACE



CHALET




SARKIT



SHANTUNG




TURQUOISE



VOLCANO



LEAF



CLOVER



ZEBRA



OLIVE



# SATIN LINE

YORMAT



Light Transmittance ●●●●●

YORLUX



Light Transmittance ●●●●●

CRYSTALLUX



Light Transmittance ●●●●●

## Properties

- Customisable sizes
- Consistent finish and appearance
- Will not peel, scratch, degrade, discolor or wear and tear
- Soft and silk touch
- It is easy to bend and laminate under any process; cutting, polishing, beveling, temperate toughening
- Easy to clean and resistant
- Resistant to common cleaners. There is no additive application or a bonded layer.

## Applications

- Decorative surfaces & mirrors
- Furniture, caseloads & surfaces
- Staircases & Railings
- Walls & Partitions
- Interior partitions
- Office enclosures
- Shower and Bath enclosures
- Interior and Exterior doors
- Kitchen & Bathroom countertops

# YORMAT

## The Art Of Privacy



### Light Transmittance

3 mm Clear Float Yormat	80,9
4 mm Clear Float Yormat	81,0
6 mm Clear Float Yormat	80,7
8 mm Clear Float Yormat	80,2
10 mm Clear Float Yormat	80,1
12 mm Clear Float Yormat	80,0
4 mm Low Iron Yormat	82,8
6 mm Low Iron Yormat	82,4
8 mm Low Iron Yormat	81,9
10 mm Low Iron Yormat	81,8
12 mm Low Iron Yormat	81,7

Colours and finishings that has shown in the photographs may slightly differ in natural light.

Substrate	Thickness	Light Transmittance	
Clear Float	3 mm - 12 mm	85% - 87%	
Low Iron	4 mm - 12 mm	86% - 88%	
Substrate	Gloss	Clarity	Haze
Clear Float	10 - 15	6 - 10	90% - 95%
Low Iron	10 - 15	6 - 10	90% - 95%



# EQUALIS

## Feel The Same




Max size 3210x2250mm | Thickness 3mm - 19 mm  
Available on Low Iron, Bronze, Grey, Blue, Green float glass.

### Properties

- 3D visual effect
- High value appearance
- Consistent finish on both sides
- Creates excellent privacy
- Natural light diffusion
- Low reflectance
- Privacy/light control

### Applications

- Decorative surfaces & mirrors
- Furniture, caseloads & surfaces
- Staircases & Railings
- Walls & Partitions
- Interior partitions
- Office enclosures
- Shower and Bath enclosures
- Interior and Exterior doors

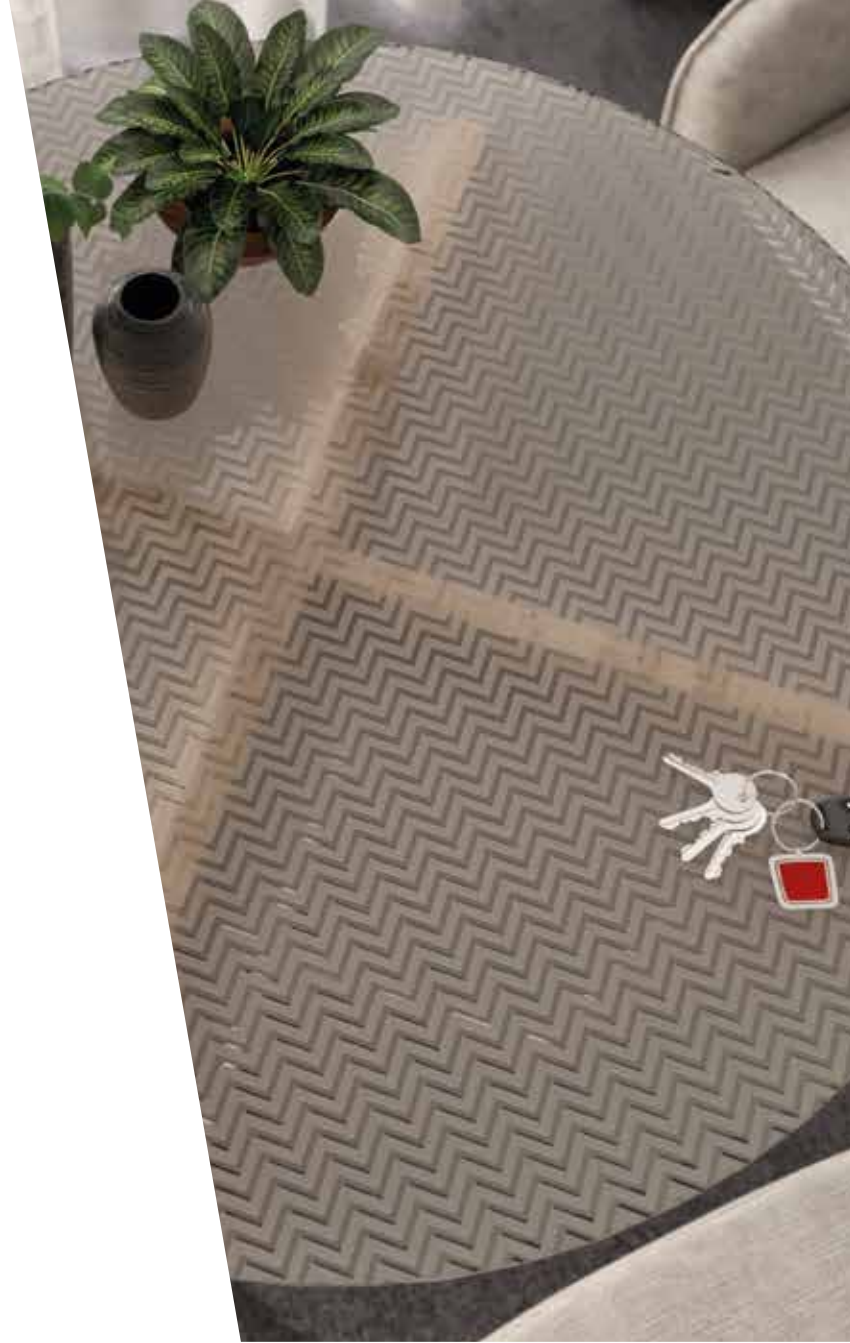



# YORFLOOR

## Designed for Your Comfort



Max size 3210x2250mm | Thickness 4mm - 15mm  
Available on Clear and Low Iron float glass.

### Properties

- 3D visual effect
- High value appearance
- Consistent finish on both sides
- Creates excellent privacy
- Natural light diffusion
- Low reflectance
- Privacy/light control

### Applications

- Decorative surfaces & mirrors
- Furniture, caseloads & surfaces
- Staircases & Railings
- Walls & Partitions
- Interior partitions
- Office enclosures
- Shower and Bath enclosures
- Interior and Exterior doors


#### Anti - Slip Safety

In accordance with regulations in DIN 51130 (2010) Standard and R safety classes, Yorfloor is suitable to use in parking areas, traffic paths, entrances, sanitary areas, indoor and outdoor stairs.


#### Abrasion Resistance

Yorfloor stands out with its guaranteed performance through its abrasion resistance.


According to EN 13748-2 Standard Yorfloor is classified as HG class floor tiles with an average of 9 cm<sup>3</sup>/50cm<sup>2</sup>.

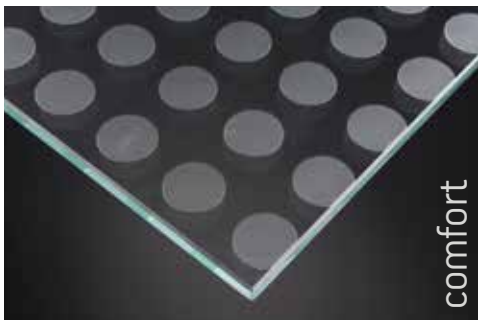


R10 Anti-Slip Degree Certification from IFA Institute Germany

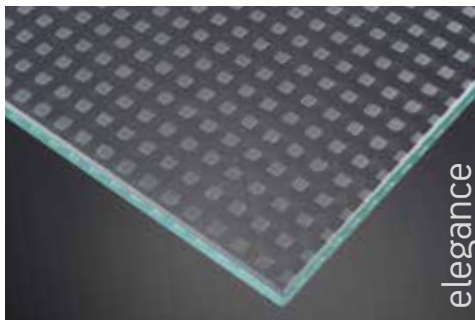


R10 Anti-Slip Degree Certification from IFA Institute Germany

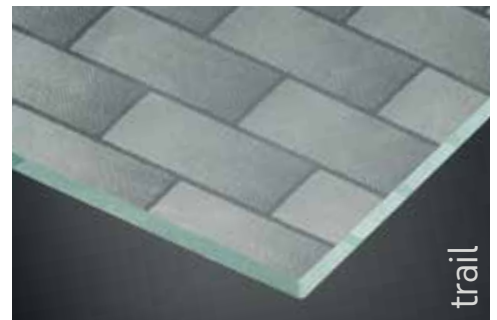


R12 Anti-Slip Degree Certification from IFA Institute Germany

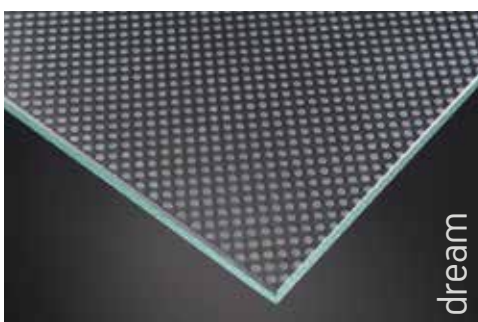

R10 Anti-Slip Degree Certification from IFA Institute Germany

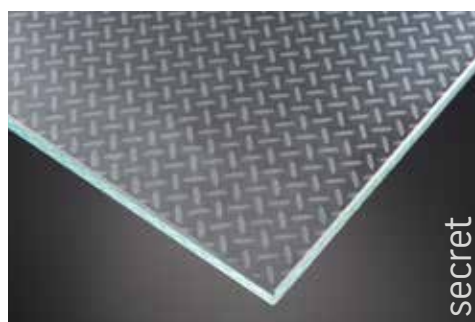

R11 Anti-Slip Degree Certification from IFA Institute Germany

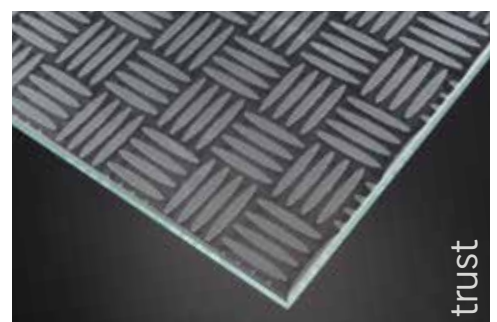

R11 Anti-Slip Degree Certification from IFA Institute Germany

# YORFLOOR

## Designed for Your Comfort



Max size 3210x2250mm | Thickness 4mm - 15mm  
Available on Clear and Low Iron float glass.

### Properties

- Customisable sizes
- Consistent finish and appearance
- No degradation, nor wear, does not pickle or discolor, and will not change over time
- Soft and silk touch
- It is easy to bend and laminate under any process; cutting, polishing, beveling, temperate toughening
- Easy to clean and resistant to marks and stains
- Resistant to common cleaners. There is no additive application or a bonded layer

### Anti - Slip Safety


In accordance with regulations in DIN 51130 (2010) Standard and R safety classes, Yorfloor is suitable to use in parking areas, traffic paths, entrances, sanitary areas, indoor and outdoor stairs.

### Abrasion Resistance


Yorfloor stands out with its guaranteed performance through its abrasion resistance. According to EN 13748-2 Standard Yorfloor is classified as HG class floor tiles with an average of 9 cm<sup>3</sup>/50cm<sup>2</sup>.




## TRANSPARENT DESIGNS

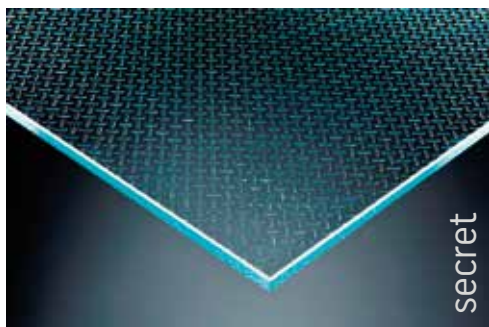

R9 Anti-Slip Degree Certification from IFA Institute Germany

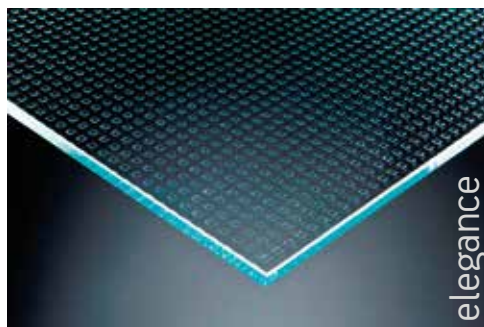

R9 Anti-Slip Degree Certification from IFA Institute Germany

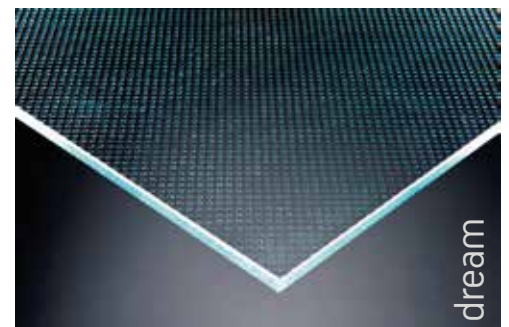

R10 Anti-Slip Degree Certification from IFA Institute Germany

# YORGLASS

SATINATED



**YORGLASS CAM SAN. VE TİC. A.Ş.**  
**Keçiliköy OSB Mah. Metin Ersan Cad. No:13**  
**45140 / MANISA / TURKEY**



**+90 850 622 02 26**



**info@yorglass.com**  
**marketing@yorglass.com**