

★ 山夏公司保留产品图片和参数规格变更的权利，如有更改恕不另行通知

Flextech reserves the right to make modifications without prior technical data and illustrations are not binding

Flextech®

F 专注人性化玻璃机械
ocus on glass processing machine

- 全自动倒角机连线
Automatic Glass Corner Grinding Machine (Online)
- 玻璃异型磨边加工中心
Glass CNC Work Center
- 玻璃自动打孔机
Automatic Glass CNC Drilling Machine



FOSHAN FLEXTech GLASS TECHNOLOGIES CO.,LTD

- 电话 /Tel/Wechat/Whats App: + (86) 15817893329
- 邮箱 /Mail: flex009@gmail.com / sam_flextech@163.com
- 网址 /Web: www. iflex.com
- 地址 /Add: 中国广东省佛山市顺德区容桂华口华天北三路
Huatian North Road, Huakou,Rongui,Shunde District,Foshan city, Guangdong, China

FOSHAN FLEXTech GLASS TECHNOLOGIES CO.,LTD.

C 公司介绍

COMPANY PROFILE

— 全球首创
CNC 高速玻璃倒角机连线

— 政府肯定
社会信赖的科技型企业


— 欧盟 CE
产品认证

通过全体成员的睿智与努力，公司于 2017 年通过国家高新技术企业认证；山夏坚持自主创新，主营产品拥有自主知识产权的发明专利及实用新型专利 10 多项（包括：玻璃全自动倒角机、CNC 异型磨边加工心和玻璃钻孔机，翻片机械臂等）。本公司同时配备高精度龙门铣床，高速激光切割机，全自动折弯机等高精密机械加工设备来配合本公司的设备生产。

公司注重创新的现场管理理念，将“6S”生产现场管理，及“4S”服务贯穿在整个生产，销售及售后等服务全过程。本公司主要产品顺利通过欧盟 CE 产品认证，已与全球诸多国家的知名公司建立了长期稳定和良好的合作关系和业务交往。

Through the wisdom and efforts of all members, the company was certified as a national high-tech enterprise in 2017; Flextech insists on independent innovation, and its main products have more than 10 invention patents and utility model patents with independent intellectual property rights (including: automatic glass chamfering machine, CNC special-shaped edging machining center and glass drilling machine, turning robot arm, etc.). The company is also equipped with high-precision gantry milling machines, high-speed laser cutting machines, automatic bending machines and other high-precision machining equipment to cooperate with the company's equipment production.

Flextech pays attention to innovative on-site management concepts, and applies "6S" production site management and "4S" services throughout the entire process of production, sales and after-sales services. The company's main products have successfully passed the EU CE product certification, and have established long-term stable and good cooperative relations and business exchanges with well-known companies in many countries around the world.

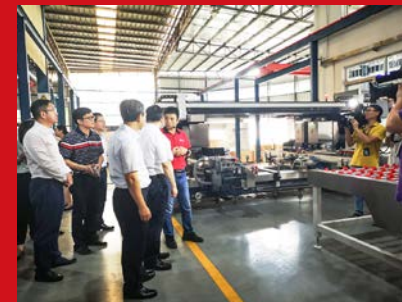

省市领导参观指导
Provincial and municipal
leaders visit and guide



公司荣誉
COMPANY Honor



国家专利



省级高新产品



C 公司理念

OMPANYCULTURE

诚信 为根本以质量拓市场
Integrity as the foundation, expand the market with quality



服务理念

客户至上，诚信为本！客户的满意是我们永远的追求
Customer first, integrity is the body! Customer satisfaction is our eternal pursuit

SERVICE PHILOSOPHY

人才 作后盾以优质创品牌
Talent as the backing to create a brand with high quality



P 合作伙伴

ARTNER

Flextech®



CG44-I

四头整体智能倒角机

Automatic Glass Corner Grinding machine(Online Model)



微信扫一扫
了解详情



高稳定性
90%
浴室玻璃生产
厂家的选择

- **建筑防火玻璃**
Architectural fireproof glass

● **淋浴房玻璃**
Shower glass

● **岩板加工等**
Sintered stone processing, etc.
- **家具玻璃**
Furniture glass

● **光伏玻璃**
Solar glass

● **家电玻璃**
Appliance glass




Flextech®

01
批量 / 散单更高效率
Batch/bulk orders are more efficient

02
适用于家私玻璃、淋浴房卫浴玻璃、烟机、炉面、电子电器玻璃、岩板加工等
Suitable for furniture glass, shower room bathroom glass, hood, stove top, electronic appliance glass, Sintered stone processing, etc.

03
通过摄像定位，自动修正玻璃误差
Automatically correct glass errors through camera positioning

04
独特抛光补偿系统，更好保证大圆角抛光效果
Unique polishing compensation system to better ensure the polishing effect of large rounded corners

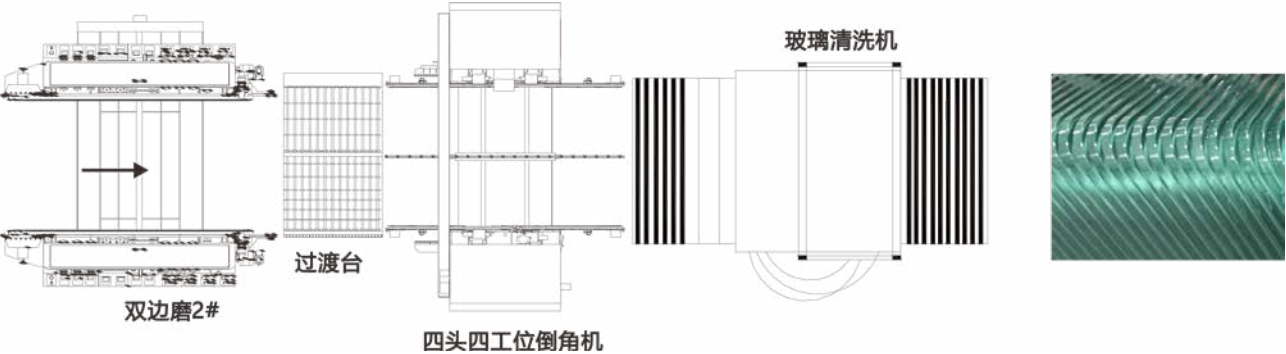

主要技术参数 Technical Paramater


产品型号 Model	CG44-1-1000	CG44-1-1600	CG44-1-2500/3000
主轴数量 Spindle QTY	4 组 4Groups	4 组 4Group s	4 组 4Groups
适用玻璃 Glass Size	250*380mm-1200*1000mm	250*500mm-1600*1000mm	250*500mm-2500*1500mm
倒角半径 Corner Radius	R2-R40mm (Option: R60, R80mm)	R2-R40mm (Option: R60, R80mm)	R2-R40mm(Option: R60, R80mm)
加工精度 Precision	+/-0.05mm	+/-0.05mm	+/-0.05mm
产品重量 Weight	4800kg	5000kg	5300kg
产品功率 Total Power	23KW	24KW	25KW
外形尺寸 Dimension	3600*3500*2200mm	3900*3800*2200mm	4100*4700*2200mm

备注：小片玻璃倒角可采用传送穿梭结构，传送速度更快。
Remarks: Small pieces of glass chamfering can adopt the conveying shuttle structure, and the conveying speed is faster.

SCG44

穿梭款倒角机

Automatic Glass Corner Grinding machine
(shuttle model)

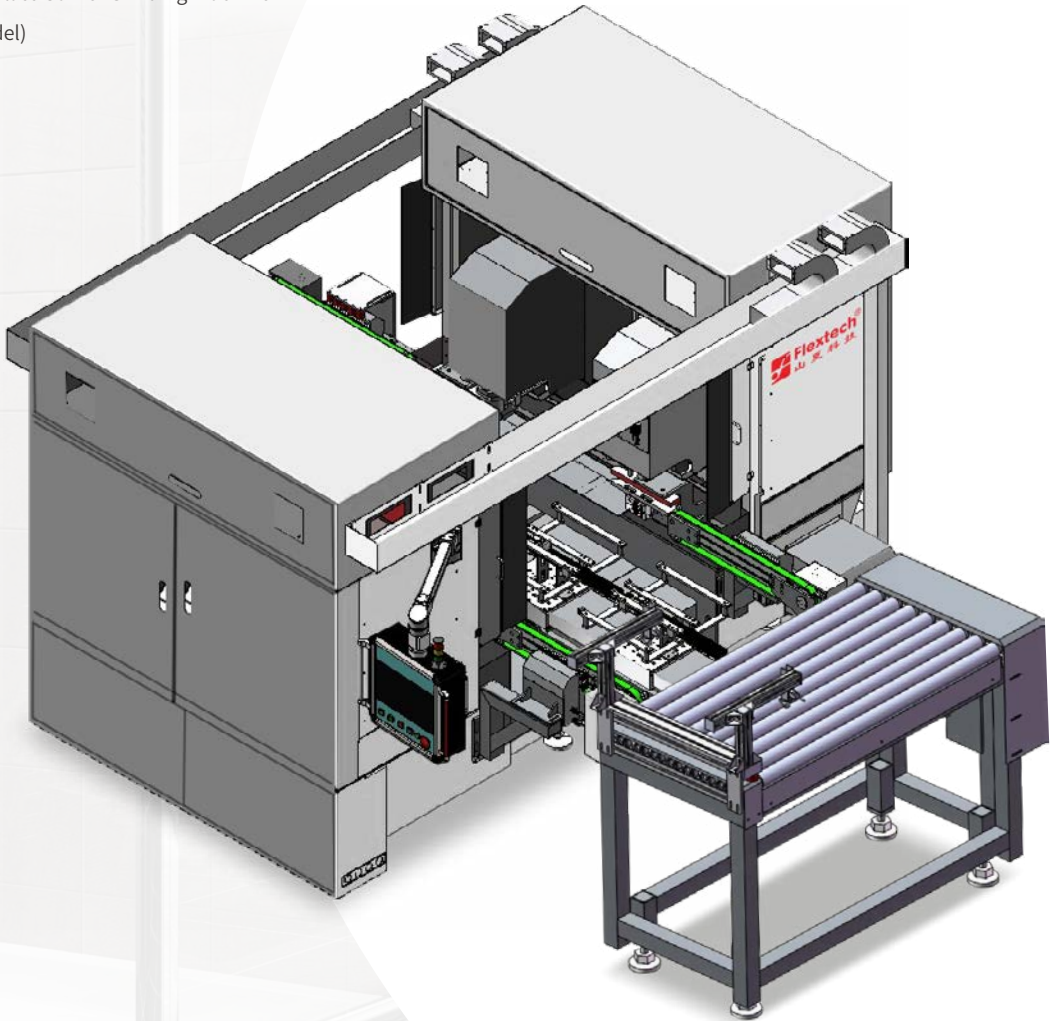

01 适用于电子电器玻璃 Glass for electronic appliances

02 通过摄像定位，自动修正玻璃误差
Automatically correct glass errors through camera positioning

03 独特抛光补偿系统，更好保证大圆角抛光效果
Unique polishing compensation system to better ensure the polishing effect of large rounded corners



主要技术参数 Technical Paramater

产品型号 Product number	SCG44-1-0805	SCG44-1-1006	SCG44-1-1206
主轴数量 Number of spindles	4 组 4Group	4 组 4Group	4 组 4Group
加工尺寸 Processing size	260*50mm-800*500mm	260*50mm-1000*600mm	260*50mm-1200*600mm
倒角半径 Chamfer Radius	R2-R40	R2-R40	R2-R40
加工精度 Precision	+/-0.05mm	+/-0.05mm	+/-0.05mm
产品重量 Weight	3500kg	4000kg	4500kg
产品功率 Total Power	23KW	23KW	23KW
外形尺寸 Dimension	3360（开合长度）*3200（宽）*2200mm（高）	3250（开合长度）*3400（宽）*2200mm（高）	3450（开合长度）*3400（宽）*2200mm（高）

CG44-2

CNC 玻璃连线倒角机

Automatic Glass Corner Grinding machine (Online Model)



微信扫一扫
了解详情

01 自动拍照定位。
Automatic photo positioning.

03 更快的散单加工速度。
Faster bulk processing speed.


02 适用于散件及批量玻璃倒角。
Suitable for bulk and bulk glass chamfering.



主要技术参数 The main technical parameters

产品型号 Model	CG44-2-2000	CG44-2-2500
主轴数量 Spindle QTY	4 组 4Group s	4 组 4Groups
适用玻璃 Glass Size	250*500mm-2000*1200mm	250*500mm-2500*1500mm
倒角半径 Chamfer Radius	R2-R40mm (可选 R60, R80mm)	R2-R40mm(可选 R60, R80mm)
加工精度 Precision	+/-0.05mm	+/-0.05mm
产品重量 Weight	5000kg	5300kg
产品功率 Total Power	24KW	24KW
外形尺寸 Dimension	4200*4100*2100mm	4800*4600*2100mm

备注：（选配）倒角半径最大为 R280MM
Note: (optional) the maximum chamfering radius is R280MM

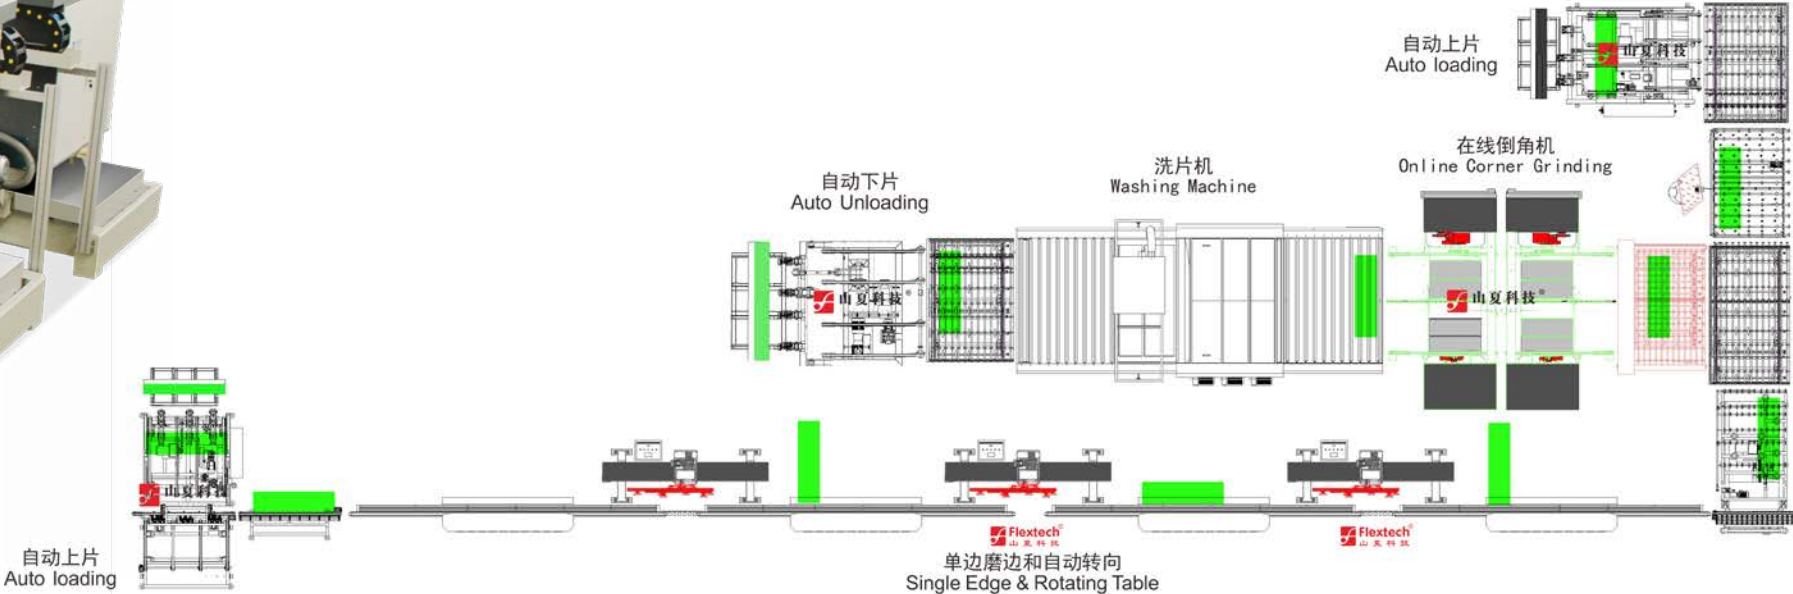

CG24

CNC玻璃连线倒角机


Automatic Glass Corner Grinding machine(Online Model)

01 自动拍照扫描定位。
Automatic photo scanning and positioning.

02 适用于散件及批量玻璃倒角。
Suitable for bulk and bulk glass chamfering.

03 更高散单加工性价比
Higher cost performance for bulk processing

04 可连自动检测台或同双边磨对接
Can be connected with automatic testing table or with bilateral grinding

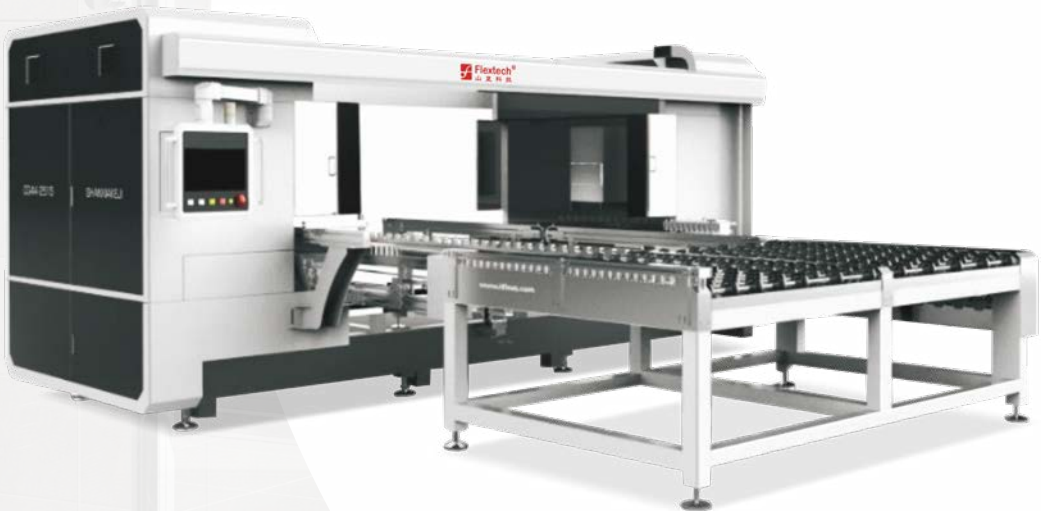

●双头四工位倒角机连线

Double-head four-station chamfering machine connection


Flextech®

主要技术参数

The main technical parameters

产品型号 Model	CG24-2000	CG24-2500/3000
主轴数量 Spindle QTY	2 组 2Group s	2 组 2Groups
适用玻璃 Glass Size	250*500mm-2000*1200mm	250*500mm-2500*1500mm
倒角半径 Chamfer Radius	R2-R40mm	R2-R40mm
加工精度 Precision	+/-0.05mm	+/-0.05mm
产品重量 Weight	5000kg	5300kg
产品功率 Total Power	24KW	24KW
外形尺寸 Dimension	4200*4100*2100mm	4800*4600*2100mm

备注：（选配）倒角半径最大为 R280MM
Note: (optional) the maximum chamfering radius is R280MM

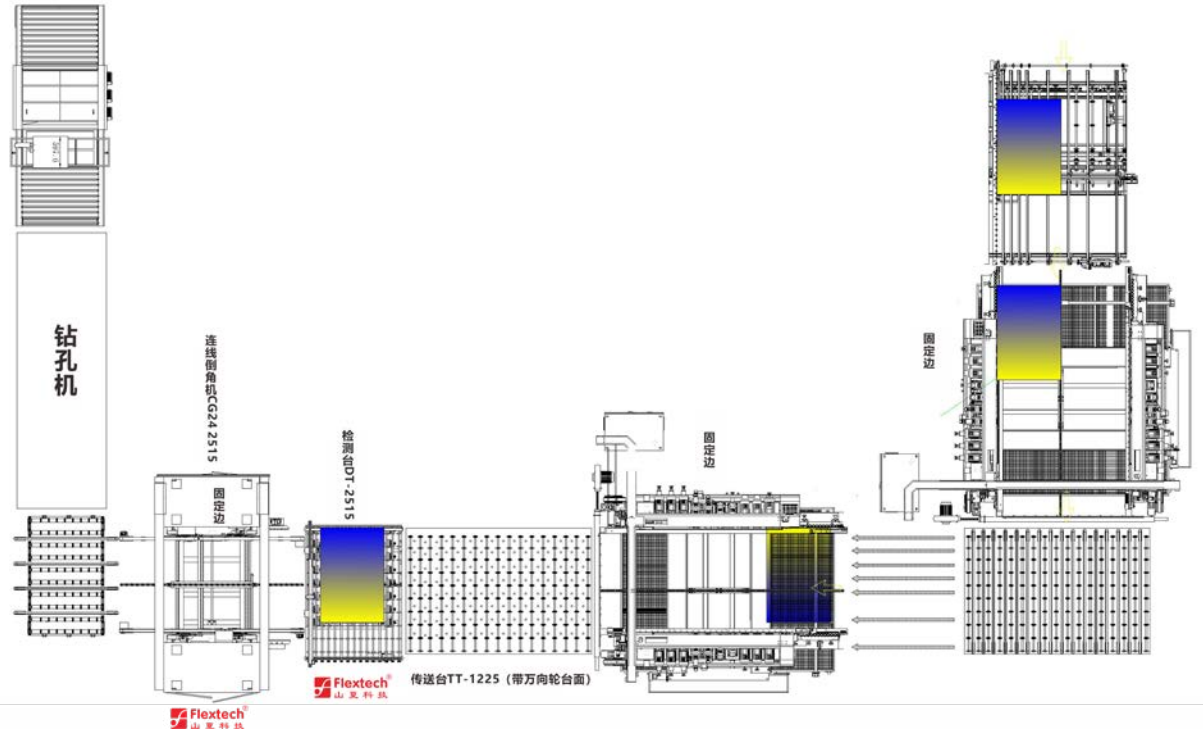

CNC

玻璃加工中心异形磨边

GLASS CNC WORK CENTER



微信扫一扫
了解详情

01 采用 PC+NC 控制方式；当加工小片玻璃时，可采用双工位加工；加工可分粗磨，精磨，抛光分步进行 / 铣刀加工；各异形及圆弧段系统自动调整加工速；人机界面简洁易学。

Adopt PC+NC control mode; when processing small pieces of glass, double-station processing can be used; the processing can be divided into rough grinding, fine grinding, and polishing step-by-step / milling cutter processing; the system automatically adjusts the processing speed for each special-shaped and arc segment; The man-machine interface is simple and easy to learn.



主要技术参数

The main technical parameters

产品型号 Model	GPC-1208	GPC-1610	GPC-2212	GPC-2515	GPC-3015
主轴功率 Spindle Power	11.5KW	11.5KW	11.5KW	11.5KW/ 15KW	11.5KW/ 15KW
适用玻璃 Glass Size	1200*800mm	1600*1000mm	2200*1200mm	2500*1500mm	3000*1500mm
适用厚度 Glass Thickness	2-12mm	2-12mm	2-12mm	2-12mm	2-12mm
加工精度 Precision	+/-0.1mm	+/-0.1mm	+/-0.1mm	+/-0.1mm	+/-0.1mm
产品重量 Weight	3100kg	3500kg	4000kg	4500kg	4800kg
产品功率 Total Power	18KW	18KW	18KW	18KW	18KW
外形尺寸 Dimension	3000*2600*1900mm	3600*2800*1900mm	4200*3000*1900mm	4500*3300*1900mm	5000*3300*1900mm


CNC

连线玻璃加工中心异形磨边


GIASS CNC WORK CENTER (ONLINE)

Flextech®

同步带连线
Timing belt connection

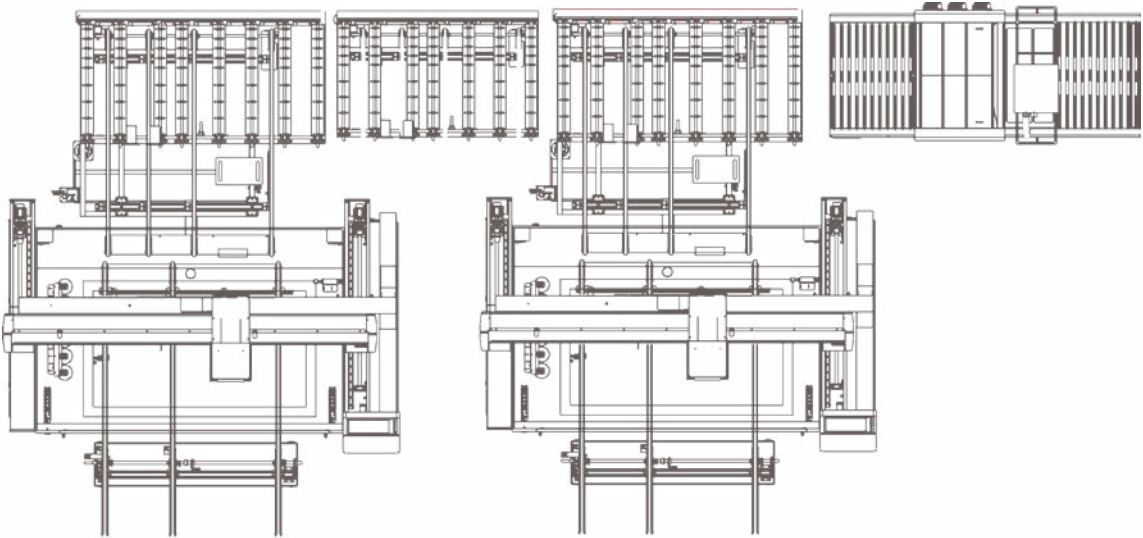

机器人连线
Robot connection

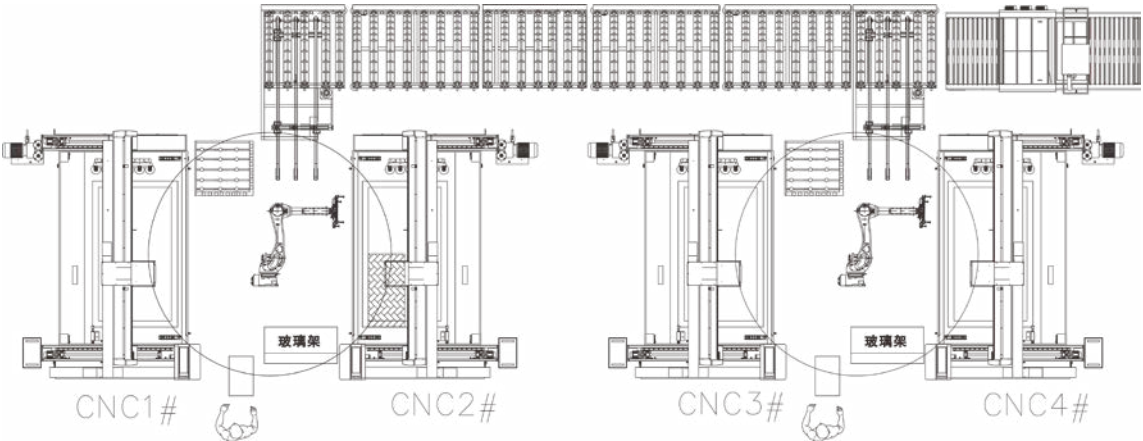

DEDO1


CNC 单头自动玻璃钻孔机

Automatic glass CNC drilling machine



微信扫一扫
了解详情

01 采用 PLC 及触摸屏实现 8 组伺服轴联动的自动控制 ; 两组独立主轴双面钻孔 , 可设定单工位或双工位运行 , 简单高效。
PLC and touch screen are used to realize the automatic control of 8 sets of servo shaft linkage; two sets of independent spindles are drilled on both sides, and single-station or double-station operation can be set, which is simple and efficient.

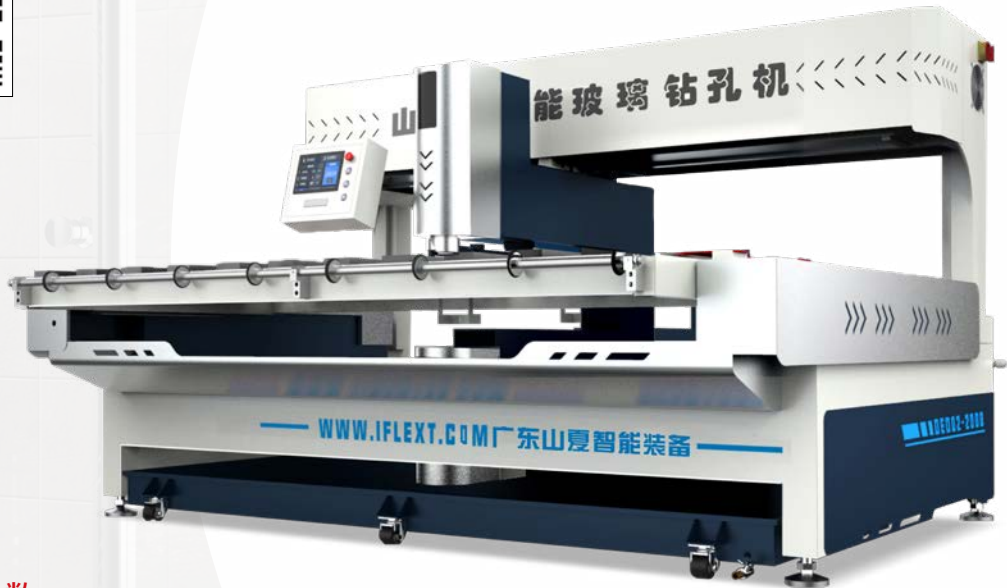

主要技术参数

The main technical parameters

产品型号 Model	DED01-1005	DED01-1308	DED01-1508/2008
主轴数量 Spindle QTY	1 组 1Group	1 组 1Group	1 组 1Group
适用玻璃 Glass Size	1000*500mm	1300*800mm	1500*800mm/2000*800mm
适用厚度 Glass Thickness	3-12mm	3-12mm	3-12mm
加工精度 Precision	+/-0.05mm	+/-0.05mm	+/-0.05mm
产品重量 Weight	1500kg	1800kg	2000kg
产品功率 Total Power	8KW	8KW	8KW
外形尺寸 Dimension	1900*2000*1800mm	2200*2200*1800mm	2400*2300*1800mm

DEDO2

CNC 双头自动玻璃钻孔机

Automatic glass CNC drilling machine

01 采用 PLC 及触摸屏实现 8 组伺服轴联动的自动控制 ; 两组独立主轴双面钻孔 , 可设定单工位或双工位运行 , 简单高效。
PLC and touch screen are used to realize the automatic control of 8 sets of servo shaft linkage; two sets of independent spindles are drilled on both sides, and single-station or double-station operation can be set, which is simple and efficient.



主要技术参数

The main technical parameters

产品型号 Model	DED02-2008
主轴数量 Spindle QTY	2 组 2Group
适用玻璃 Glass Size	2000*800mm
适用厚度 Glass Thickness	3-12mm
加工精度 Precision	+/-0.2mm
产品重量 Weight	2200kg
产品功率 Total Power	13KW
外形尺寸 Dimension	2950*2400*1800mm

DASII

CNC 自动钻孔机连线

GLASS ONLINE CNC DRILLING MACHINE

01

基于工业电脑的数控技术，可与系统管理软件 ERP 数据对接；适用于更多孔径的复杂玻璃的钻孔，三种孔径可一次完成，可直接洗片机相连。

Based on industrial computer numerical control technology, it can be connected with system management software ERP data; it is suitable for drilling complex glass with more apertures, three apertures can be completed at one time, and can be directly connected to the processor.



微信扫一扫
了解详情


主要技术参数

The main technical parameters

产品型号 Model	DAS11/DAS01	DAS21
主轴数量 Spindle QTY	2/1 组 2/1Groups	3 组 3Group s
适用玻璃 Glass Size	2400*1500mm	2400*1500mm
适用厚度 Glass Thickness	3-12mm	3-12mm
加工精度 Precision	+/-0.2mm	+/-0.2mm
产品重量 Weight	3300/3200kg	3500kg
产品功率 Total Power	18KW/16KW	19KW
外形尺寸 Dimension	4800*3600*1800mm	4800*3600*1800mm

备注：（选配）倒角半径最大为 R280MM

Note: (optional) the maximum chamfering radius is R280MM

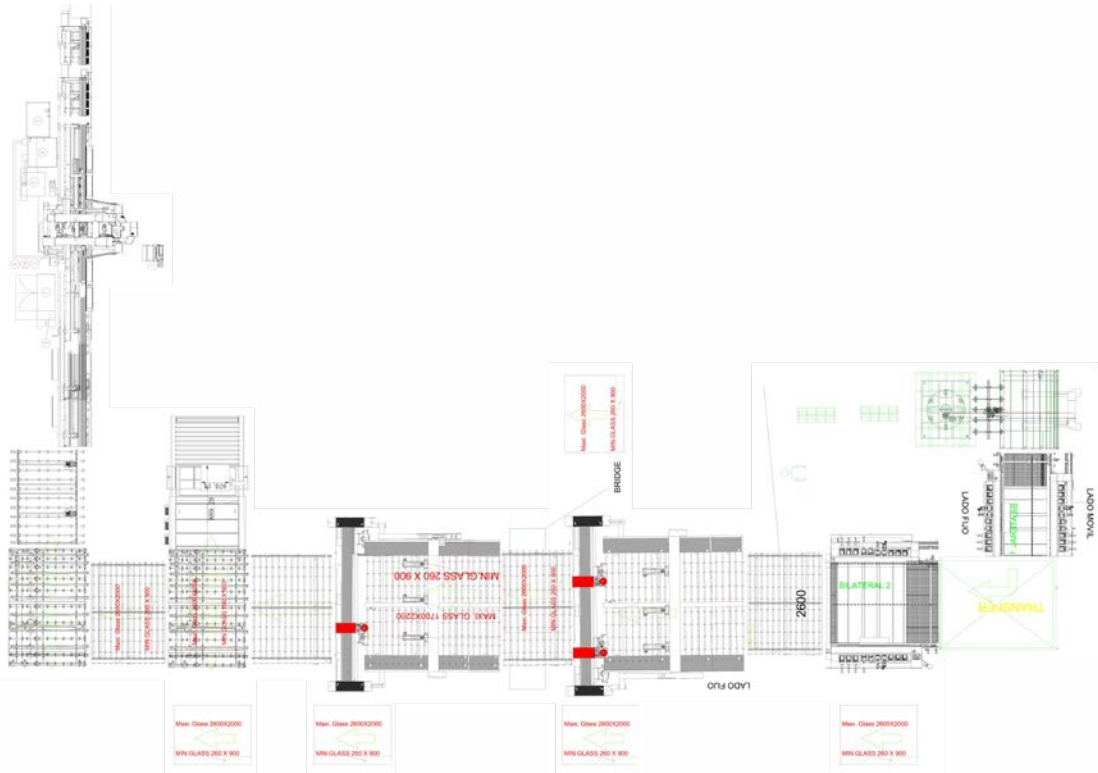

CG12

单头双工位自动倒角机

Automatic Glass Corner Grinding machine

- 01

可同时在双工位上放两块玻璃，一块正在加工过程中，可调另一块玻璃定位。基于工业电脑数控技术，不同倒角半径通过参数调整即可。

Two pieces of glass can be placed on the double station at the same time, one piece is being processed, and the other piece of glass can be adjusted for positioning. Based on industrial computer numerical control technology, different chamfering radii can be adjusted by parameters.
- 02

通过摄像定位，自动修正玻璃误差 (选配)

Automatically correct glass errors through camera positioning (optional)



主要技术参数

The main technical parameters

产品型号 Model	CG12
主轴数量 Spindle QTY	1 组 1Group
适用玻璃 Glass Size	Max: 1970mm; Min: 500mm
倒角半径 Chamfer Radius	R2-R40mm
加工精度 Precision	+/-0.05mm
产品重量 Weight	600kg
产品功率 Total Power	9KW
外形尺寸 Dimension	1800*1250*1800mm

CG22

CNC 双头自动倒角机

Automatic Glass Corner Grinding machine



微信扫一扫
了解详情



- 01

单片玻璃可同时完成两个角的倒角、抛光；当玻璃尺寸过小时可分当两台单头机器使用。

A single piece of glass can complete the chamfering and polishing of two corners at the same time; when the glass size is too small, it can be used as two single-head machines.
- 02

通过摄像定位，自动修正玻璃误差 (选配)

Automatically correct glass errors through camera positioning (optional)

主要技术参数

The main technical parameters

产品型号 Model	CG22-2000	CG22-2500
主轴数量 Spindle QTY	2 组 2Group	2 组 2Group
适用玻璃 Glass Size	Max: 1970mm; Min: 500mm	Max: 2500mm; Min: 500mm
倒角半径 Chamfer Radius	R2-R40mm (可选 R60, R80)	R2-R40mm (可选 R60, R80)
加工精度 Precision	+/-0.05mm	+/-0.05mm
产品重量 Weight	1600kg	1500kg
产品功率 Total Power	9KW	9KW
外形尺寸 Dimension	2600*1750*1800mm	3600*1750*1800mm


自动化

自动化连线机械
Automatic connection machinery



主要技术参数 Technical Paramater

产品型号 Model	TR-100
适用玻璃厚度 Glass Thicknessndle	3-12mm
用玻璃尺寸 Glass Size	2200*300mm
产品重量 Weight	1100kg
产品功率 Total Power	3KW
外形尺寸 Dimension	1400*3000*1600mm

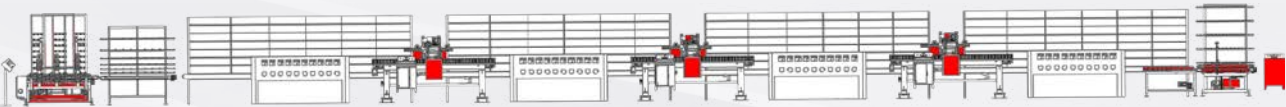

A 售后服务 FTER-SALES SERVICE

Flextech®



专业技术 | 解决行业难题

提供专业的方案
Provide professional solutions



对客户的实际情况进行充分的评估，为客户提供最优的设备和解决方案。

Fully evaluate the actual situation of customers and provide customers with the best equipment and solutions.

安装调试培训
Installation and commissioning training



产品安装调试，岗位操作培训和机械维护保养等全方位服务。

Product installation and commissioning, on-the-job training and machinery maintenance and other full-service services.

全国联保服务
Nationwide warranty service



全国联保服务，只要您使用山夏的产品，我们承诺，对产品终身维护。

National warranty service, as long as you use Flextech products, we promise to maintain the products for life.

24 小时服务
24-hour service



承诺 24 小时内解决问题或给出解决方案，质保期间不收取任何配件费用。

Promise to solve the problem or give a solution within 24 hours, and no charge will be charged during the warranty period.

您的 **满意** 是我们 **努力** 的方向
Your satisfaction is the direction of our efforts